



The ultimate
exterior film.

Knows no limits.
RENOLIT EXOFOL FX.



Rely on it.



RENOLIT EXOFOL FX.

Time flies but quality lasts.

With RENOLIT EXOFOL FX, exterior film no longer knows any limits. This premium product gives building components an unprecedented longevity, whether in New York, Sydney, Hanoi, Shanghai or New Delhi.

RENOLIT EXOFOL FX is extremely weather, chemical and UV resistant. Its high performance composition keeps the gloss level virtually unchanged over the entire service life.

Its low surface tension makes the film dirt-repellent and easy to clean, even graffiti is easy to remove. The easy to clean surface of RENOLIT EXOFOL FX opens new applications opportunities.



Clear advantages in all areas.

RENOLIT EXOFOL FX protects and enhances PVC and metal profiles and panel surfaces for exterior applications:

- Windows
- Folding shutters
- Fences
- Doors
- Garage doors
- Panels

With RENOLIT EXOFOL FX, building components have an extended lifespan – helping support long term sustainability. Enhanced product composition enables intricate woodgrain designs and bold solid colours. A worldwide warranty of up to twenty years ensures exceptional peace of mind.



*Easy to clean
including
anti-graffiti*



*Worldwide
application*



*Extremely
weather
resistant*



*Chemical
resistant*


Protection and beauty for every climate.

RENOLIT EXOFOL FX brings new colour variety to construction components. Even in the most UV intensive climates, films virtually maintain their colour quality throughout the product life due to its multi-layered structure. The top layer consists of a polyvinylidene fluoride (PVDF) film, the middle layer of transparent polymethylmethacrylate (PMMA) and the base film PMMA coloured with infrared-reflecting pigments. Thanks to its Solar Shield Technology (SST), RENOLIT EXOFOL FX also protects window profiles from strong solar radiation.

Weather exposure tests in accordance with RAL-GZ 716 and DIN EN 513 demonstrate that RENOLIT EXOFOL FX by far exceeds the requirements of the RAL quality standards.

That is why we can offer a worldwide warranty of up to twenty years for this product.

Diagram showing the structure of the exterior film
RENOLIT EXOFOL FX

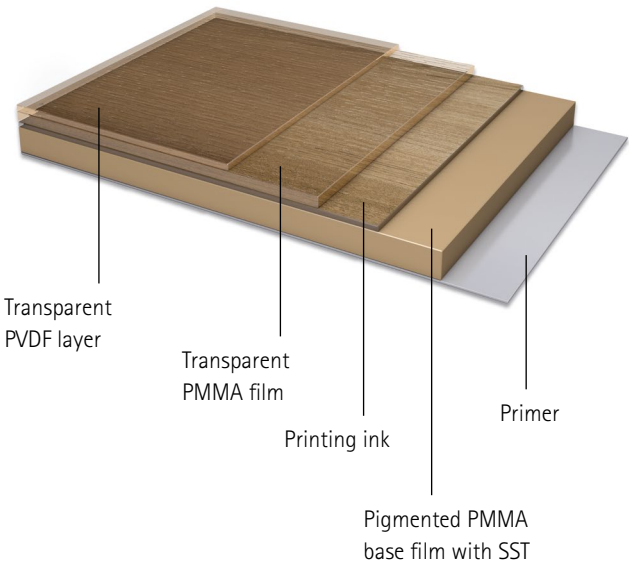

Trouble free processing.


RENOLIT EXOFOL FX has a reverse side primer coating. Its particularly even distribution enables easy lamination and exceptional bond strength. The film can be processed with the most common PUR-hotmelt adhesive and lamination systems currently available on the market.

RENOLIT offers a comprehensive range of solid colours and woodgrains to give individual design possibilities.

We also offer application consulting and custom order related slitting.

Long lasting warranty.

Looks good, stays good.

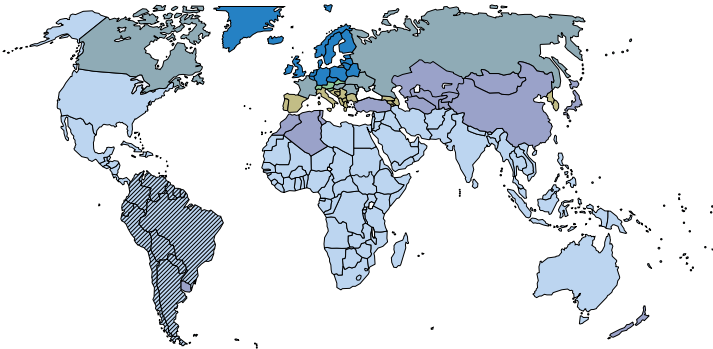

Warranty period*

Country group	1	2	3	4	5	6	20
RENOLIT EXOFOL FX	20	20	20	20	20	20	20

*up to (in years)

RENOLIT SE

Market Unit Exterior Solutions
Horchheimer Str. 50
67547 Worms | Germany
Phone: +49.6241.303.1040
Fax: +49.6241.303.18.1139

RENOLIT Cramlington Limited

Station Road
Northumberland, NE23 8AQ
Cramlington | United Kingdom
Phone: +44.1670.718222
Fax: +44.1670.590096

exteriorsolutions@renolit.com
www.renolit.com/exteriorsolutions

vinyl^{plus}



Rely on it.